

TECHNICAL DATA SHEET

My-T-Lok® 133

Thread Sealant

April 2019



METLOK PRIVATE LIMITED
(An ISO 9001 Certified Company)
W-27, M.I.D.C. Industrial Area
Kalmeshwar – 441 501, Nagpur

Product Description

My-T-Lok® 133 is designed for the hydraulic locking and sealing of metal threaded pipes and fittings. The product cures when confined in the absence of air between close fitting metal surfaces and prevents loosening and leakage from shock and vibration.

Special Features:

- ❖ Low Viscosity, thixotropic,
- ❖ Medium Strength Hydraulic Sealant
- ❖ Reduces migration of liquid product after application to the substrate.

Applications:

- ❖ For the locking and sealing of metal threaded pipes and fittings.
- ❖ Particularly suitable for use on stainless steel without the need for surface activation

Properties


Technology	: Acrylic
Chemical Type	: Dimethacrylate ester
Component	: One component
Appearance	: Blue
Specific Gravity @ 25 °C	: 1.06
Viscosity @ 25±2 °C, Brookfield, Spindle # 2, Speed 2.5 r.p.m.	: 1000 -3000 cP
Cure	: Anaerobic
Secondary cure	: Activator
Strength	: Medium
Service Temperature	: -50 °C to 150 °C
Application	: Thread Sealant

Curing Performance

The product cures when confined in the absence of air between closed fitting metal surfaces. Although functional strength is developed in a relatively short time, curing continues for at least 24 hours before full chemical / solvent resistance is developed.


Cure Speed Vs Substrate

The rate of cure will depend on the substrate used. The graph below shows the breakaway strength developed with time on M10 Phosphated Steel nuts and bolts and tested according to BIS 13055:1991.

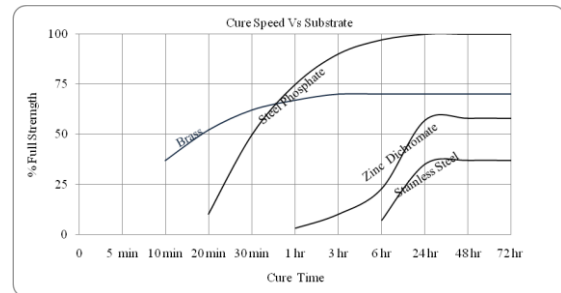

Cure Speed Vs Temperature


The rate of cure will depend on the ambient temperature. The graph below shows the breakaway strength developed with time on M10 Phosphated Steel nuts and bolts at different temperature and tested according to BIS 13055:1991.

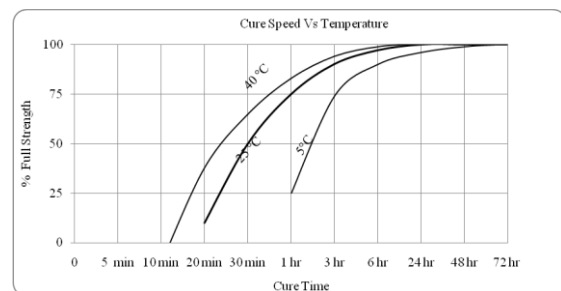

Cure Speed Vs Activator

Where cure speed is unacceptably long due to large gaps, applying activator to the surface will improve cure speed. However, this can trim down ultimate strength of the bond and therefore testing is recommended to confirm effect.

The graph below shows the breakaway strength developed with time on M10 Zinc plated steel nuts and bolts using different activators and tested according to BIS 13055:1991.

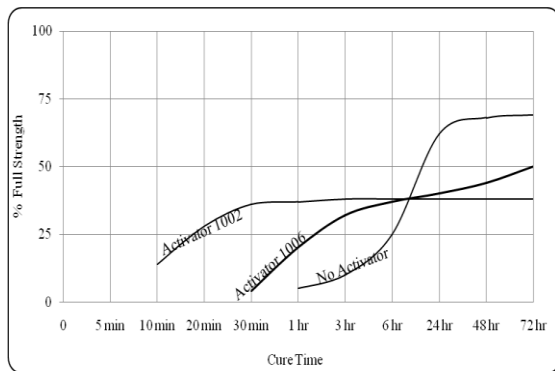

Adhesive Properties of Cured Material

Torque, BIS 13055:1991; After 24 hrs @ 25±2 °C
 Breakaway Torque, : 12-20 N-m
 M10 Phosphated Steel N&B
 Prevail Torque : 10-15 N-m
 M10 Phosphated Steel N&B


Compressive Shear Strength, BIS 13055:1991;
 After 24 hours @ 25±2 °C
 Steel Pins and collars : ≥ 6.5 N/mm²

Pipe sealing /Thread sealing BIS 13055:1991;
 After 24 hrs @ 25±2 °C
 Pressure Resistance : ≥ 100 bar

Hot Strength

Test : Breakaway Torque, BIS 13055:1991
 Substrate : M10 Phosphated Steel N&B
 Cure : 24 hrs @ 25±2 °C


Tested at temperature indicated

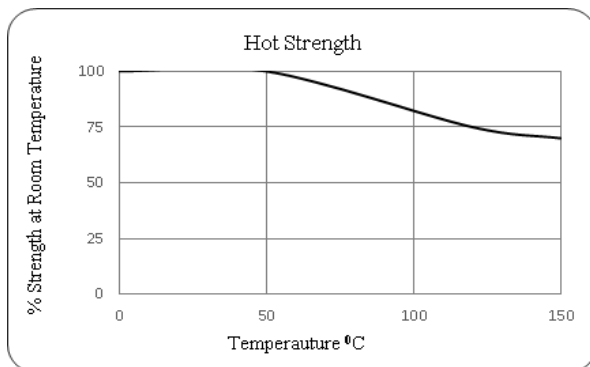

Heat Aging

Test : Breakaway Torque, BIS 13055:1991
 Substrate : M10 Phosphated Steel N&B
 Cure : 24 hrs @ 25±2 °C

Aged at temperature indicated and tested @ 25±2 °C.

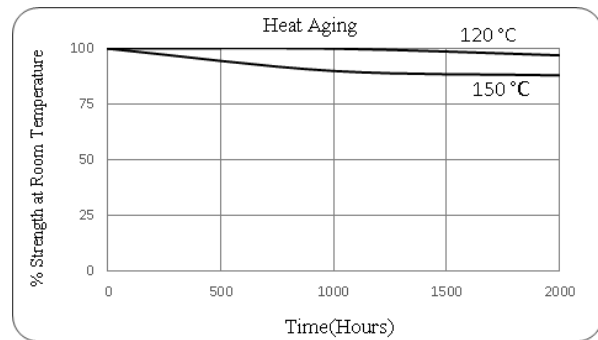

Chemical/Solvent Resistance

Test : Breakaway Torque, BIS 13055:1991
 Substrate : M10 Phosphate Steel N&B
 Cure : 24 hrs @ 25±2 °C

Aged under condition indicated and tested @ 25±2 °C.

Environment	Temp (°C)	% of Initial Strength		
		100 hrs	200 hrs	500 hrs
Engine oil	120	100	100	100
Gear oil	120	100	100	100
Unleaded Petrol	25±2	100	100	100
Diesel	25±2	100	100	100
Brake fluid	25±2	100	100	100
Water Glycol (50/50)	87	100	95	90

Directions for Use

For Assembly

- For best results, clean all surfaces with a cleaning solvent and allow to dry
- If the material is an inactive metal or the cure speed is too slow, apply all threads with Activator and allow to dry
- Apply product to the leading threads of the male fitting, leaving the first thread free. Force the material into the threads to thoroughly fill the voids. For bigger threads and voids, adjust product amount accordingly and apply product on the female threads also.
- Using accepted trade practices assemble and wrench tighten fittings until proper alignment is obtained.
- Properly tightened fittings will seal instantly to moderate pressures. For maximum pressure resistance and solvent resistance allow the product to cure a minimum of 24 hours.

For Disassembly

- Remove with standard hand tools.

2. Where hand tools do not work because of excessive engagement length or large diameters, apply localized heat to approximately 250 °C. Disassemble while hot.

For Cleanup

1. Cured product can be removed with a combination of soaking in a solvent and mechanical abrasion such as a wire brush.

Pack Size

My-T-Lok® 133 is ideally available in 50 ml and 250 ml.

Handling Precautions

- ❖ For safe handling My-T-Lok® 133 must be handled in a manner as indicated in Material Safety Data Sheet (MSDS) and in compliance with relevant local regulations.
- ❖ My-T-Lok® 133 is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials
- ❖ My-T-Lok® 133 can affect certain plastics particularly thermoplastic materials or coatings. It is recommended to check all surfaces for compatibility before use.
- ❖ Where aqueous washing systems are used to clean the surfaces before bonding, it is important to check for compatibility of the washing solution with the adhesive. In some cases these aqueous washes can affect the cure and performance of the adhesive.
- ❖ My-T-Lok® 133 is non-volatile and non-flammable at room temperature.

Storage

- ❖ Store My-T-Lok® 133 in a cool, dry location in unopened containers at 25±2°C.
- ❖ Store away from sunlight and heat sources.
- ❖ My-T-Lok® 133 will exhibit a shelf life of 18 months from the date of manufacture when stored in above mentioned conditions.
- ❖ To prevent contamination of unused product, do not return any material to its original container.

Note

All statements, technical information and recommendations set forth herein are based on tests which Metlok Private Limited, believes to be reliable. However, Metlok Private Limited does not guarantee their accuracy or completeness. We cannot assume responsibility for the results

obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In no case will Metlok Private Limited be liable for direct, consequential economic or other damages.

METLOK PRIVATE LIMITED

(Bonding and Sealing Solutions)

An ISO 9001: 2015 Certified Company

Tel.: 07118-271543/271170/272468

Fax: 07118-272470

Visit us at: www.metlok.in