

TECHNICAL DATA SHEET

My-T-Lok® 2205

Master Gasket

January 2017



METLOK PRIVATE LIMITED
(An ISO 9001 Certified Company)
W-27, M.I.D.C. Industrial Area
Kalmeshwar – 441 501, Nagpur

Product Description

My-T-Lok® 2205 cures when confined in the absence of air between close fitting metal surfaces. It seals close fitting joints between rigid metal faces and flanges.

Feature:

- ❖ Provides resistance to low pressures immediately after assembly of flanges.
- ❖ This product may be dispensed robotically with the appropriate product conditioning and dispensing systems.
- ❖ Maintains flexibility after exposure to high temperature.

Applications:

My-T-Lok® 2205 used as a form-in-place gasket on rigid flanged connections, e.g. gearbox and engine casings etc.

Properties


Technology	: Acrylic
Chemical Type	: Urethane methacrylate
Components	: One component
Appearance	: Red
Specific Gravity @ 25 °C	: 1.13
Viscosity @ 25±2 °C, Brookfield, Spindle # 7, Speed 20 rpm.	: 50000 -65000 cP
Viscosity @ 25±2 °C, Brookfield, Spindle # 7, Speed 2.5 r.p.m.	: 200000 -400000 cP
Cure	: Anaerobic
Secondary Cure	: Activator
Strength	: Medium
Service Temperature	: -50 °C to 150 °C
Application	: Gasket and Sealant

Curing Performance

The product cures when confined in the absence of air between closed fitting metal surfaces. Although functional strength is developed in a relatively short time, curing continues for at least 24 hours before full chemical/solvent resistance is developed.


Cure Speed vs. Substrate

The rate of cure will depend on the substrate used. The graph below shows the shear strength developed with time on steel lap shears compared to different materials and tested according to ASTM D 1002.

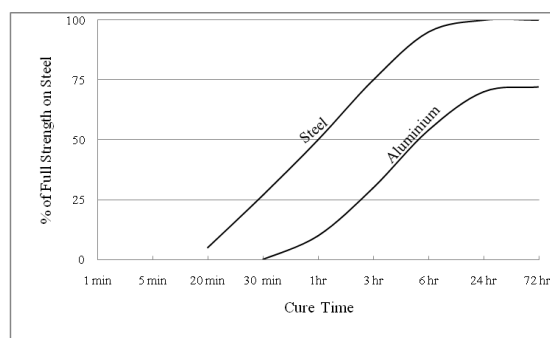

Cure Speed vs. Temperature


The rate of cure will depend on the ambient temperature. The graph below shows the shear strength developed with time on steel lap shears at different temperatures and tested according to ASTM D 1002.

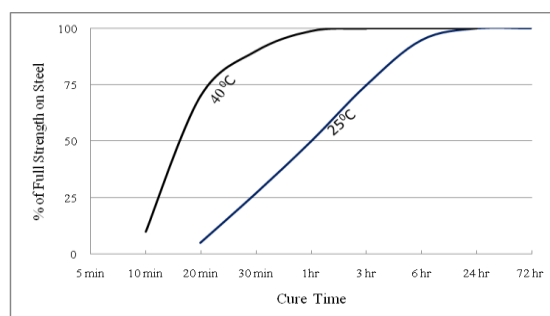

Cure Speed vs. Activator

Where cure speed is unacceptably long due to large gaps, applying activator to the surface will improve cure speed. However, this can trim down ultimate strength of the bond and therefore testing is recommended to confirm effect.

The graph below shows the shear strength developed with time on steel lap shears using different activators and tested according to ASTM D 1002.

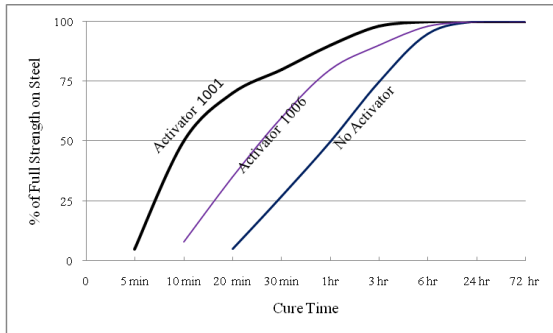

Adhesive Properties of Cured Material

Lap Shear Strength, ASTM D 1002 ;After 24 hrs @ 25±2 °C
Steel : ≥ 4 N/mm²

Tensile Strength, ASTM D-897 ; After 24 hrs @ 25±2 °C
Steel : ≥ 4 N/mm²

Compressive Shear Strength, BIS 13055:1991;
After 24 hrs @ 25±2 °C
Steel Pins and Collars : ≥ 6 N/mm²

Sealing Capability

An annular shaped gasket with an inner diameter of 60 mm and an external diameter of 90 mm was tested up to 100 bars, hydraulic pressure, for pressure drop, after 24 hrs (BIS 13055:1991).

No Induced Gap : No Drop
Induced Gap;0.25 mm : No Drop

Instant Sealing Capability


My-T-Lok 2205 has the ability to resist low on-line test pressures while uncured. This test was performed with uncured product immediately after assembly of an annular shaped Steel flange and zinc plated flange before cure occurred. The pressure was maintained for 1 minute.

Pressure Resistance,
Induced Gap 0.05 mm : 10 bar

Hot Strength

Test : Lap Shear Strength, ASTM D 1002
Substrate : Steel
Cure : 24 hrs @ 25±2 °C


Tested at temperature indicated

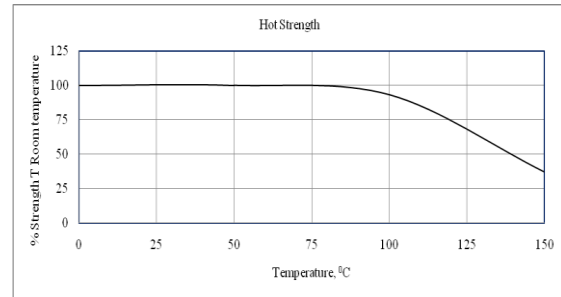

Heat Aging

Test : Lap Shear Strength, ASTM D 1002
Substrate : Steel
Cure : 24 hrs @ 25±2 °C

Aged at temperature indicated and tested @ 25±2 °C.

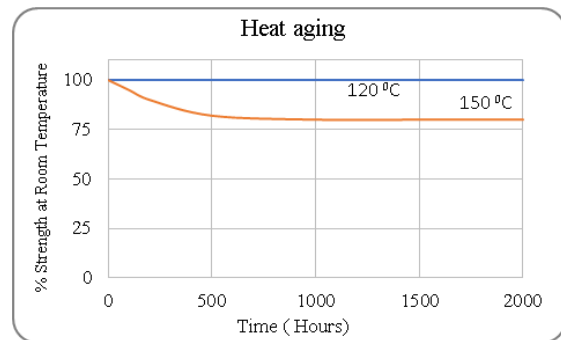

Chemical/Solvent Resistance

Test : Lap Shear Strength, ASTM D-1002
Substrate : Steel
Cure : 24 hrs @ 25±2 °C

Aged under condition indicated and tested @ 25±2 °C.

Environment	Temp (°C)	% of initial strength	
		100 hr	200 hr
Engine Oil	120	100	100
Gear Oil	120	100	100
Water Glycol (50/50)	87	35	20
Unleaded Petrol	25±2	100	100
Diesel	25±2	100	100

Directions for use

1. For best performance bond surfaces should be clean and free from grease.
2. The product is designed for close fitting flanged parts.
3. Apply manually as a continuous bead to one surface of the flanges.

4. Low pressures may be used when testing to confirm a complete seal immediately after assembly and before curing.
5. Flanges should be assembled and tightened as soon as possible after assembly to keep away from shimming.
6. Clean excess adhesive.

Handling

- ❖ For safe handling My-T-Lok® 2205 must be handled in a manner as indicated in Material Safety Data Sheet (MSDS) and in compliance with relevant local regulations.
- ❖ My-T-Lok® 2205 is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials
- ❖ My-T-Lok® 2205 can affect certain plastics particularly thermoplastic materials or coatings. It is recommended to check all surfaces for compatibility before use.
- ❖ Where aqueous washing systems are used to clean the surfaces before bonding, it is important to check for compatibility of the washing solution with the adhesive. In some cases these aqueous washes can affect the cure and performance of the adhesive.
- ❖ My-T-Lok® 2205 is non-volatile and non-flammable at room temperature.

Storage

- ❖ Store My-T-Lok® 2205 in a cool, dry and unopened container at 25±2°C.
- ❖ Store away from sunlight and heat sources.
- ❖ My-T-Lok® 2205 will exhibit a shelf life of 18 months when stored in above mentioned conditions.
- ❖ To prevent contamination of unused product, do not return any material to its original container. For further specific shelf life information, contact our Technical Service center R&D Center.

Pack Size

My-T-Lok® 2205 is ideally available in 50 ml, 250 ml and 1ltr pack size.

Note

All statements, technical information and recommendations set forth herein are based on tests which Metlok Private Limited, believes to be reliable. However, Metlok Private Limited does not guarantee their accuracy or completeness. We cannot assume responsibility for the results obtained by others over whose methods we have no

control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In no case will Metlok Private Limited be liable for direct, consequential economic or other damages.

METLOK PRIVATE LIMITED

(Bonding and Sealing Solutions)

An ISO 9001: 2015 Certified Company

Tel.: 07118-271543/271170/272468

Fax: 07118-272470

Visit us at: www.metlok.in