

Product Description

My-T-Lok® 471 is a high strength, low viscosity retaining compound designed for the bonding of cylindrical fitting parts, particularly where consistently clean surfaces cannot be assured. The product cures when confined in the absence of air between close fitting metal surfaces and prevents loosening and leakage from shock and vibration

Special Feature:

- ❖ A retaining compound tolerant of oil and other contamination
- ❖ Seal and secures cylindrical assemblies
- ❖ Fixture in 5-8 minutes
- ❖ Prevent fretting and corrosion of metal assemblies

Applications

- ❖ Retaining roller bearings or oil impregnated bushings into housings.

Properties


| | | |
|---|---|-----------------------|
| Technology | : | Acrylic |
| Chemical type | : | Urethane Methacrylate |
| Components | : | One component |
| Appearance | : | Green liquid |
| Specific Gravity @ 25 °C | : | 1.09 |
| Viscosity | : | Low |
| Brookfield Viscosity @ 25±2 °C, Spindle #2; Speed 20 rpm. | : | 150-200 cP |
| Cure | : | Anaerobic |
| Secondary cure | : | Activator |
| Strength | : | High |
| Service temperature | : | -50 °C to 150 °C |
| Application | : | Retaining |

Curing Performance

The product cures when confined in the absence of air between closed fitting metal surfaces. Although functional strength is developed in a relatively short time, curing continues for at least 24 hours before full chemical / solvent resistance is developed.


Cure Speed vs. Substrate

The rate of cure will depend on the substrate used. The graph shows the shear strength developed with time on steel pins and collars and tested according to BIS 13055:1991.

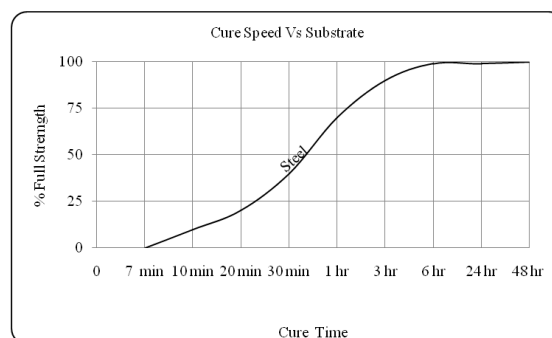

Cure Speed vs. Temperature


The rate of cure will depend on the ambient temperature. The graph below shows the shear strength developed with time at different temperatures on steel pins and collars and tested according to BIS 13055:1991.

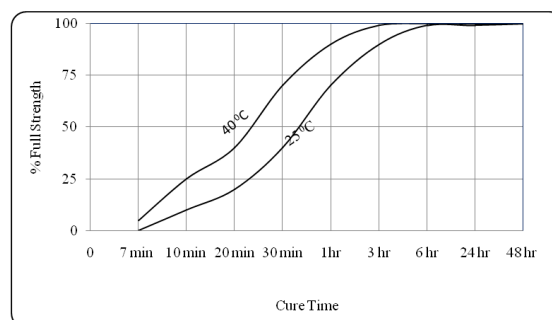

Cure Speed vs. Activator

Where cure speed is unacceptably long due to large gaps, applying activator to the surface will improve cure speed. However, this can trim down ultimate strength of the bond and therefore testing is recommended to confirm effect.

The graph below shows shear strength developed with time using Activator® 1001 and Activator® 1006 on steel pins and collars and tested according to BIS 13055:1991.

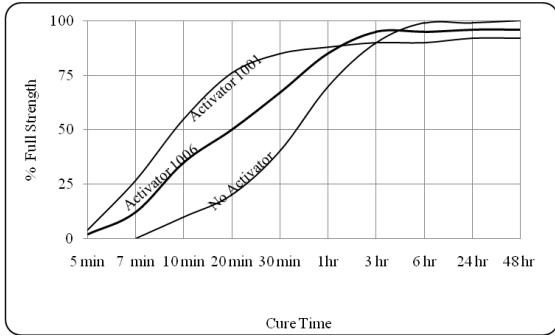

Adhesive Properties of Cured Material

Compressive Shear Strength, BIS 13055:1991;
After 24 hours @ 25±2 °C
Steel Pins and collars : 15-25 N/mm²


Compressive Shear Strength, BIS 13055:1991;
After 60 min @ 25±2 °C
Steel Pins and Collars : 9-15 N/mm²

Torque, BIS 13055:1991 After 24 hours @ 25±2 °C
Breakaway Torque, : 35-50 N-m
M10 Phosphated Steel N&B
Prevail Torque, : 25-35 N-m
M10 Phosphated Steel N&B

Hot Strength

Test : Shear Strength, BIS 13055:1991
Substrate : Steel Pins and Collars
Cure : 24 hrs @ 25±2°C


Tested at temperature indicated

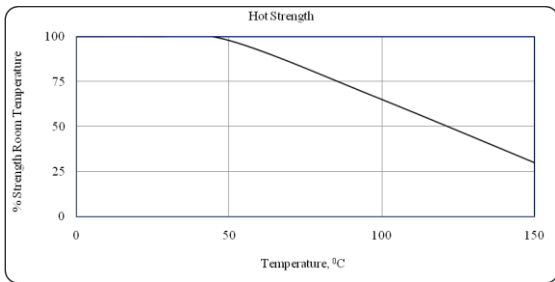

Heat Aging

Test : Shear Strength, BIS 13055:1991
Substrate : Steel Pins and Collars
Cure : 24 hrs @ 25±2°C

Aged at temperature indicated and tested @ 25±2 °C.

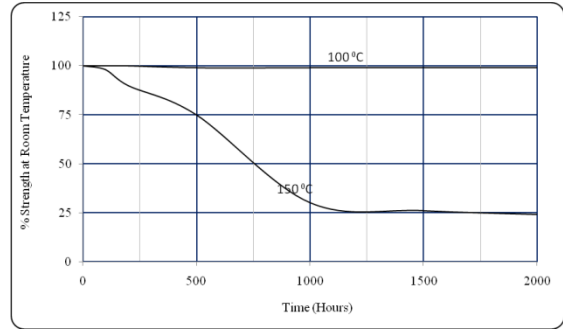

Chemical/Solvent Resistance

Test : Shear Strength, BIS 13055:1991
Substrate : Steel Pins and Collars
Cure : 24 hrs @ 25±2°C

Aged under condition indicated and tested @ 25 °C

| Environment | Temp (°C) | % of Initial Strength | | |
|----------------------|-----------|-----------------------|---------|----------|
| | | 100 hrs | 500 hrs | 1000 hrs |
| Engine oil | 120 | 100 | 100 | 100 |
| Water Glycol (50/50) | 87 | 95 | 82 | 60 |
| Ethanol | 25±2 | 100 | 100 | 100 |
| Acetone | 25±2 | 100 | 79 | 70 |

Directions for Use

1. For best performance bond surfaces should be clean and free from grease.
2. If the material is an inactive metal or the cure speed is too slow, apply Activator® 1001 and Activator® 1006 on all threads and allowed to dry.
3. For Slip Fitted Assemblies, apply adhesive around the leading edge of the pin and the inside of the collar and use a rotating motion during assembly to ensure good coverage.
4. For Press Fitted Assemblies, apply adhesive thoroughly to both bond surfaces and assemble at high press on rates.
5. For Shrink Fitted Assemblies the adhesive should be coated onto the pin, the collar should then be heated to create sufficient clearance for free assembly.
6. Parts should not be disturbed until sufficient handling strength is achieved.

For Disassembly

1. Apply localized heat to the assembly to approximately 250 °C. Disassemble while hot.

For Cleanup

1. Cured product can be removed with a combination of soaking in a solvent and mechanical abrasion such as a wire brush.

Handling

- ❖ For safe handling My-T-Lok[®] 471 must be handled in a manner as indicated in Material Safety Data Sheet (MSDS) and in compliance with relevant local regulations.
- ❖ My-T-Lok[®] 471 is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials
- ❖ My-T-Lok[®] 471 can affect certain plastics particularly thermoplastic materials or coatings. It is recommended to check all surfaces for compatibility before use.
- ❖ Where aqueous washing systems are used to clean the surfaces before bonding, it is important to check for compatibility of the washing solution with the adhesive. In some cases these aqueous washes can affect the cure and performance of the adhesive.
- ❖ My-T-Lok[®] 471 is non-volatile and non-flammable at room temperature.

Storage

- ❖ Store Product My-T-Lok[®] 471 in a cool, dry location in unopened containers at a temperature between 10°C to 20°C unless otherwise labeled. Optimal storage is at the lower half of this temperature range.
- ❖ Store away from sunlight and heat sources.
- ❖ My-T-Lok[®] 471 will exhibit a shelf life of 18 months when stored in above mentioned conditions.
- ❖ To prevent contamination of unused product, do not return any material to its original container. For further specific shelf life information, contact our technical service center or R&D Center.

Pack Size

My-T-Lok[®] 471 is ideally available in 50 ml and 250 ml pack size.

Note

All statements, technical information and recommendations set forth herein are based on tests which Metlok Private Limited, believes to be reliable. However, Metlok Private Limited does not guarantee their accuracy or completeness. We cannot assume responsibility for the results

obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In no case will Metlok Private Limited be liable for direct, consequential economic or other damages.

Continuous Product Improvement is an important policy of the company and is an ongoing activity . As such we reserve the right to improve the performance of the product continuously by modifying the formulation in a manner that it enhances the performance functions.

METLOK PRIVATE LIMITED

(Bonding and Sealing Solutions)

An ISO 9001: 2015 Certified Company

Tel.: 07118-271543/271170/272468

Fax: 07118-272470

Visit us at: www.metlok.in